

SERIES EVA

DUAL FUNCTIONALITY

No wiring

The EVA series consists of:

A mechanical part (installed on the door leaf)

An electrical part (installed on the door frame) This system's strength lies in a mechanical part that does not require electrical wiring for installation. The bolt is ejected automatically when the door is closed and can be opened using an electric impulse, handle or key. The simplicity of this lock offers a good solution for installations that require extra security.



Technical characteristics


Voltage:	12V-15W (AC-DC)
Consumption:	900 mA
Door status:	Yes (Optional)
Bolt status:	Yes (Optional)
Complies with the directive:	EN179

3 6 5 0 1 3 2 1 A B/D

0099-CPR-A44-0156

Suitable for
EUROPEAN
camera profiles

Suitable
for **SALINE**
environments

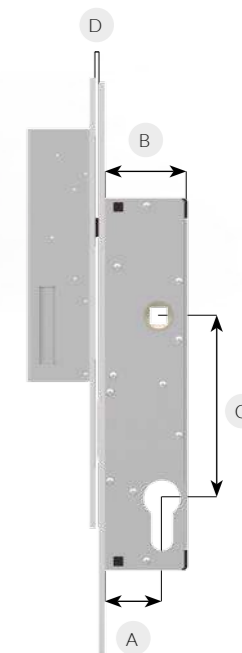

OPTIONALS	Door status (Reed)	Hinged door function	Rounded Faceplate	A	B	C	D
				EVA20	R	B	FR
EVA25	R	B	FR	25	38,5		
EVA30	R	B	FR	30	43,5		
EVA35	R	B	FR	35	48,5		
EVA40	R	B	FR	40	53,5		
EVA50	R	B	FR	50	60,5		
EVA60	R	B	FR	60	70,5		

OPTIONALS